


Ausführung / construction: Quadro / multi turn

Welle / shaft: \varnothing 4 mm, L = 30 mm
 Buchse / bushing: M7 x 0,75
 Drehbereich / rotation angle: $270^\circ \pm 5\%$
 Belastbarkeit / rated wattage: lin. 0,2 W / log 0,05 W

ALPHASTAT 16 63261-044XX
Auslauftyp

Printausführung / for printed circuits (PC)

Kontakte: SPCC, kalt gewalzter Stahl, vernickelt / Cold rolled steel sheets, nickel plated

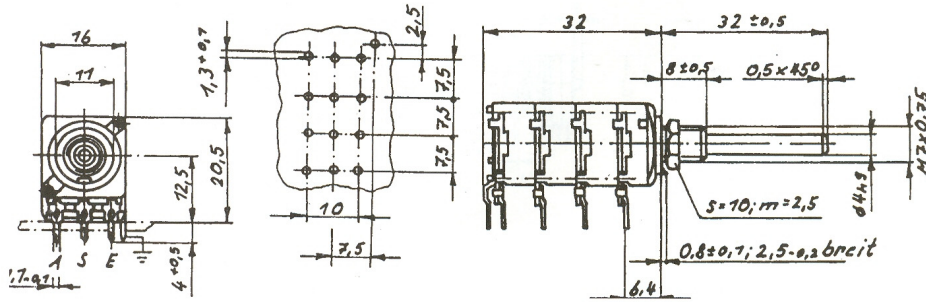

	Standard 63261-04400/—			Mittenrast / center click 63261-04410/—			Rast 11 / 11 clicks 63261-04420/—			Rast 41 / 41 clicks 63261-04440/—		
	lin.	poslog	neglog	lin.	poslog	neglog	lin.	poslog	neglog	lin.	poslog	neglog
1 k	5502			5542			5582			5622		
2 k		5515	5530		5555	5570		5595	5610		5635	5650
2,5 k	5503	5516		5543	5556		5583	5596		5623	5636	
5 k	5504	5517	5532	5544	5557	5572	5584	5597	5612	5624	5637	5652
10 k	5505	5518	5532	5545	5558	5573	5585	5598	5613	5625	5638	5653
25 k	5506	5519		5546	5559		5586	5599		5626	5639	
50 k	5507	5520	5535	5547	5560	5575	5587	5600	5615	5627	5640	5655
100 k	5508	5521	5536	5548	5561	5576	5588	5601	5616	5628	5641	5656
250 k	5509	5522		5549	5562		5589	5602		5629	5642	
500 k	5510	5523		5550	5563		5590	5603		5630	5643	
1 M	5511	5524		5551	5564		5591	5604		5631	5644	

* lagermäßige Ausführungen (unverbindlich) \\ * in stock (non-binding)